

Eclipse™

PENETRATING SEALER

An indoor/outdoor sealer that resists stains and etching and makes the hard floor surface easy to maintain and clean.



SURFACES



WHY ECLIPSE PENETRATING SEALER:

RESISTS OIL AND WATER STAINS
BETTER THAN MINERAL OIL/SILICONE
BASED SEALERS

Water-based fluorochemical solution

RESISTS ETCHING

IMPROVES CLEANING AND
MAINTENANCE EFFECTIVENESS

TRANSPARENT, DOES NOT CHANGE
THE NATURAL LOOK OF THE SURFACE

Clear formula

DIRECTIONS

Penetrating Sealer is ready-to-use. Do NOT dilute.

Apply sealer with pump sprayer set to a medium spray. Follow label instructions for proper coverage. Do not apply solution so heavily that puddles are formed.

Highly porous surfaces, such as concrete, require a second treatment which may be applied after the first treatment is dry (15-30 minutes).

Read all directions and Safety Data Sheet (SDS) before using.

Directions and SDS are available for download at pioneereclipse.com


TECHNICAL DATA

Description	Hard Floor Penetrating Sealer
Appearance	Clear, straw-colored
Viscosity (Brookfield) @ 68°F (20°C)	<10 centipoise
Flash Point ASTM D56-05 (2010)	>200°F (93°C)
Coverage Rate	50 to 250 ft ² /gal 1 to 6 m ² /liter
Dry Time	15 - 30 minutes
VOC 40 CFR Part 59 Subpart D	<50 g/l
pH ASTM E70-07	9.6
Fragrance	No added fragrance
Shelf Life ASTM D1791-93 (2008)	2 years
Density ASTM D1475-98 (2008)	8.4 lb/gal @ 68°F 1.01 kg/L @ 20°C
Detergent Resistance ASTM D3207-92 (2008)	Excellent
Freeze/Thaw ASTM D3209-93 (2008)	Passes 3 cycles

Product Code	426FS	426MPE	426GL3
Volume	2.50 US gallons	4 liters	1 US gallon
Shipping Package	2 x 2.5 gallons	4 x 4 liters	3 x 1 gallon
Pallet Quantity	48	48	60

Eclipse Penetrating Sealer

Put To The Test

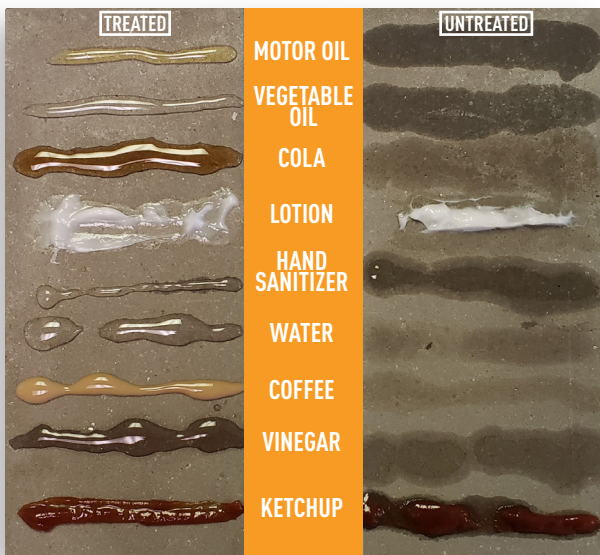

Concrete Stain Protection

- Left side treated with Eclipse Penetrating Sealer, right side untreated
- Contaminants applied to both treated and untreated concrete simultaneously
- Untreated concrete showed significant staining in just **30 minutes**



Easy to Clean

- Left side treated with Eclipse Penetrating Sealer, right side untreated
- Contaminants applied to both treated and untreated concrete simultaneously
- Image shows results of **water-only cleanup** and air dried for two hours